



### PRODUCT DESCRIPTION

The Donaldson PP-FC is the latest development in nominal rated spun bonded filter element design. Produced for strength and high void volume, against similarly rated elements in terms of life and cost effectiveness. The superior structure remains integral even under severe operating conditions and is less prone to the media migration and breakthrough often found on other unsupported spun bonded products.

The polypropylene-fibres used are without the need for binders, resins or lubricants during the extrusion process. This results in a one-piece construction that is resistant to unloading and media shedding. True depth filtration results from the closely controlled fibre production in manufacturing, and the process environment which ensures a consistent and reliable high-quality element. All the layers are inter-linked to offer maximum support while ensuring that the high void volume is maintained, but with increasing fibre density towards the element centre. Therefore, resulting in true depth filtration, ideal for use as water filters, chemical filters and trap filters.

### MAIN FEATURES & BENEFITS

- Nominally rated depth filter developed for the cost-effective pre-filtration of liquids
- 100% polypropylene construction, minimal extractables and broad chemical compatibility
- Four layer graded density ensures low initial pressure drops and high dirt capacity for extended service life
- Approved for food contact use acc. to CFR Title 21

All components meet the USA requirements for food contact use in accordance with CFR (Code of Federal Regulations) Title 21. The nominal rated PP-FC depth filter is designed and developed as pre-filter for coarse contaminations and as cost effective final filter.

### INDUSTRIES



- Food



- Beverages



- Chemical



- Pharmaceutical



- Environment

### ООО «Винокс»

220051, г. Минск, ул. Громова, 28-320

+375 (29) 630-62-66

[vinox.ooo@gmail.com](mailto:vinox.ooo@gmail.com)

[www.vinox.by](http://www.vinox.by)

**PRODUCT SPECIFICATIONS**

Features	Specifications
Retention rates	1µm, 5µm, 10µm, 20µm, 30µm, 50µm, 75µm, 100µm, 150µm @ 85 % retention efficiency
Recommended filter element change	1.5 bar (21.76 psi) differential pressure
Maximum differential pressure	3.5 bar (50 psi) @ 20°C (68°F) 1 bar (14.5 psi) @ 60°C (140°F) 0.5 bar (7.25 psi) @ 80°C (176°F)
Maximum operating temperature	80°C (176°F)
Steam sterilization	Not recommended

**APPLICATIONS**

Typical applications for PP-FC filter elements include:

**Purification of Food and Beverage products:**

- Water
- Mineral water
- Soft Drinks
- Beer
- Wine
- Spirits


**Purification of chemicals:**

- Acids
- Bases
- Complexing agents
- Alcohols, Aldehydes
- Etchants
- Chlorinated and fluorinated solvents
- Esters and Ketones
- Photo-lithographic liquids

**Purification of chemicals:**

- Cosmetics
- Oils
- Lubricants
- Paints and dyes
- Jet printer inks

**FLOW CHARACTERISTICS**

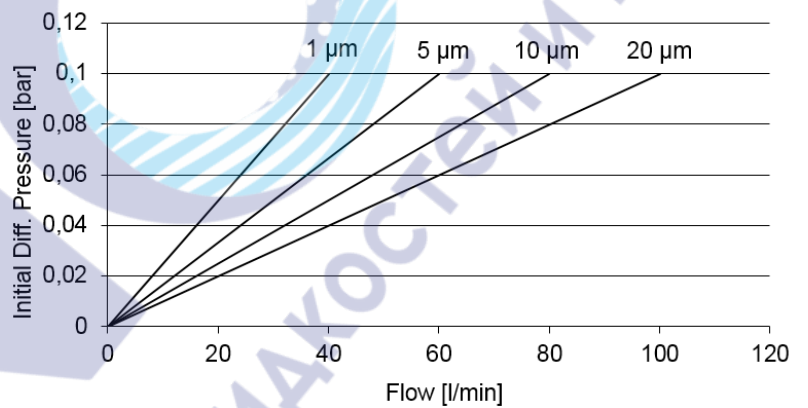

**MATERIAL COMPLIANCE USA**


All components of the PP-FC filter element are FDA listed for food contact use in the Code of Federal Regulations (CFR), Title 21:

Materials of construction		CFR Title 21
Filter medium	Polypropylene	§ 177.1520
End caps	Polypropylene	§ 177.1520
O-rings	EPDM	§ 177.2600

AVAILABLE END CAP CONFIGURATIONS


Dimensions Code 7 connection						
Size	a		b		c	
	mm	inch	mm	inch	mm	inch
5"	127	5	182	7.2	56	2.2
10"	254	10	311	12.2	56	2.2
20"	511	20.1	568	22.3	56	2.2
30"	763	30	820	32.3	56	2.2
40"	1015	40	1072	42.2	56	2.2

CODE 7: 2 x 226 O-rings, bayonet 2 locking tabs, locating fin

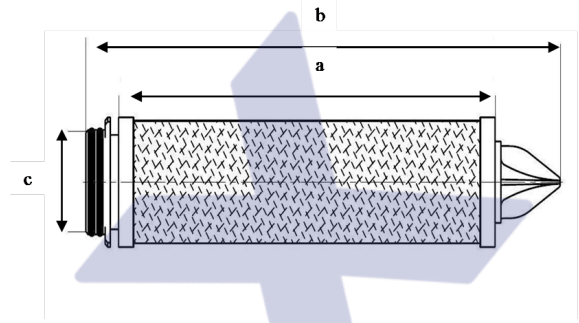

Dimensions DOE connection						
Size	a		b		c	
	mm	inch	mm	inch	mm	inch
5"	126	4.9	126	4.9	56	2.2
10"	254	10	254	10	56	2.2
20"	508	20	508	20	56	2.2
30"	762	30	762	30	56	2.2
40"	1016	40	1016	40	56	2.2

DOE: Double open end

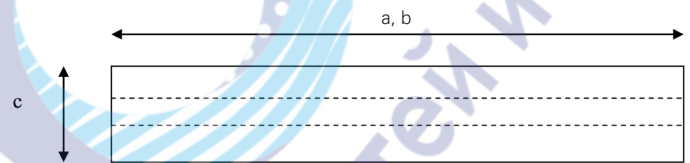

Other end cap configurations on request

- For further information please contact your Donaldson Sales Engineer or visit our website at [www.donaldson.com](http://www.donaldson.com)!